


**SECTION OF BASIN INLET**  
WITH  
TYPE "A" FACE PLATE ANCHORAGE

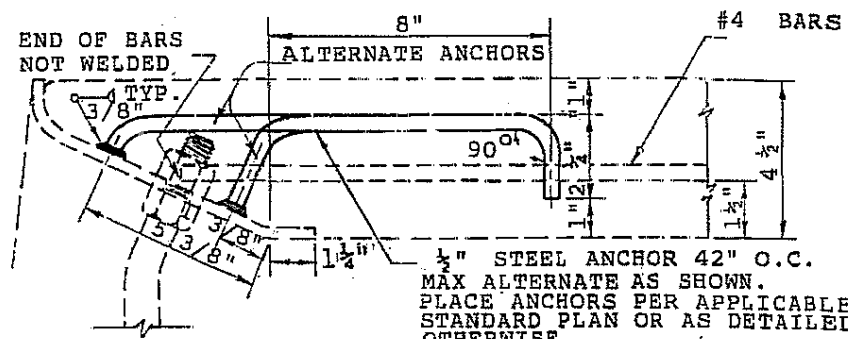

TYPE "B" FACE PLATE ANCHORS

1/2" STEEL ANCHOR 42" O.C.  
MAX ALTERNATE AS SHOWN.  
PLACE ANCHORS PER APPLICABLE  
STANDARD PLAN OR AS DETAILED  
OTHERWISE.

**NOTES:**

1. When curb face exceeds 9 1/4" a plain round steel protection bar 1" in dia. shall be installed. Bar shall be embedded 5" at each end.
2. A stirrup shall be welded to each bolt when a protection bar is required.
3. T = 8" min. when length of opening exceeds 7'0".
4. All exposed metal parts shall be galvanized.
5. When required by length of opening, face plate may be delivered in sections and butt welded in place. All galvanizing damaged by welding shall be painted with zinc dust primer or equal.
6. Type "A" or type "B" anchorage may be used at contractor's option.
7. Support bolts shall be installed when length of opening exceeds 7'-0" and shall be spaced at not more than 7'-0" on center and not less than 5'-0" on center.
8. When protection bar is required and length of openings 7'-0" or less, said bar shall be located 5" behind curb face and 4" above gutter flow line.

APPROVED <i>Ray W. [Signature]</i> CITY ENGINEER		DATE	CITY OF CHINO PUBLIC WORKS DEPARTMENT	
DATE	REVISION	BY	STANDARD DRAWING	No.
9/14/93	△ "FACE" ADDED	RFB	<b>STANDARD CATCH BASIN INLET</b>	350