


H T
8'-0" 6"
OR LESS 6"
8'-1" TO 20'-0" 8"

- *WHEN OUTLET PIPE IS CONSTRUCTED WITHIN ROADWAY, A MINIMUM OF 30" OR THE ROADWAY STRUCTURAL SECTION THICKNESS PLUS 6", WHICHEVER IS GREATER, SHALL BE MAINTAINED BETWEEN THE TOP OF PIPE AND THE ROADWAY SURFACE.
- **ALHAMBRA FOUNDRY A-1531-B, APEX STEEL CORPORATION X100B OR EQUAL WITH APPROVED LOCKING DEVICES. SHIPPING WEIGHT (FRAME & COVER) = 130 LBS.

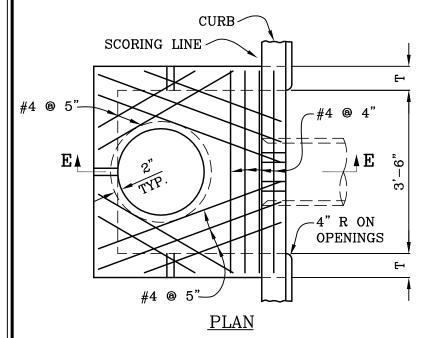

NOTES:

- 1. CURB OPENING SHALL CONFORM TO CURB ALIGNMENT.
- 2. SEE STD. PLAN 404 FOR DETAILS AND NOTES.
- 3. SEE STD. PLAN 406 FOR LOCAL DEPRESSION DETAILS.

CITY OF MISSION VIEJO



INLET TYPE I

PLAN NO.

9.23.03

401

STANDARD

APPROVED RCE 30190 DATE

____ SHT <u>1</u> OF <u>1</u>