




1. MANHOLE FRAMES AND COVERS SHALL BE MADE OF GALV. ELEC. 1200 CONFORMING TO ASTM A-48, CLASS 35, AND PAINTED WITH ASPHALTUM PAINT EXCEPT FOR MACHINED SURFACES.
2. FOUNDARY MARK SHALL BE SHOWN ON THE INSIDE OF THE FRAME AND ON THE BOTTOM OF THE COVER.
3. THE MANHOLE FRAME AND COVER SHALL BE INSPECTED BY THE ENGINEER PRIOR TO SHIPMENT. ACCEPTANCE WILL BE INDICATED BY MARKING WITH THE DISTRICT'S STENCIL.
4. COVERS SHALL BEAR THE LETTER "P" FOR STONY DALEINS.
5. COVERS FOR MANHOLES LOCATED IN EASEMENTS, ALLEYS, PARADEYS, AND ALL OTHER PLACES EXCEPT PAVED STREETS SHALL BE PROVIDED WITH ALLEN SOCIETY SET SCREW LOCKING DEVICES. THE CONSTRUCTION SHALL DRILL AND TAP TWO HOLES TO A DEPTH OF 1 INCH AT 90 DEGREES TO PIER HOLE AND INSTALL 3/4-27-1/4-INCH ALLEN SOCKET SET SCREWS.
6. COVERS HAVE BEEN DESIGNED, TESTED AND PROMULGATED BY THE APPALACH COAST COOPERATIVE COMMITTEE SOUTHERN CALIFORNIA CHAPTER.

7. THE WEIGHT OF THE COVER SHALL NOT VARY MORE THAN FIVE PER CENT FROM THAT GIVEN HEREON.

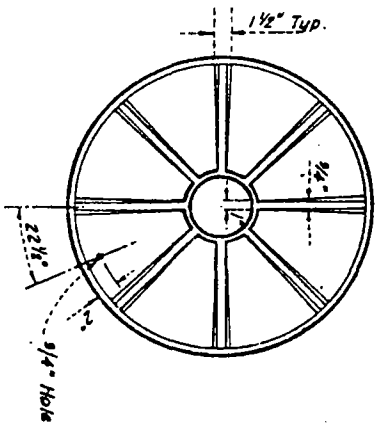



WEIGHT 175 LBS.

BOTTOM PLAN OF COVER

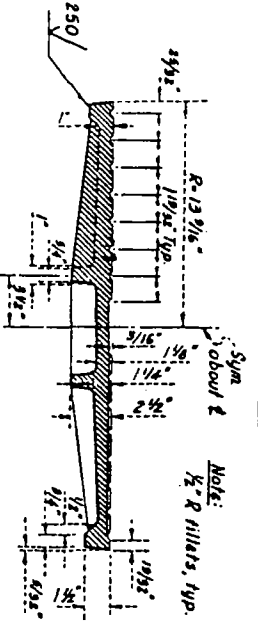

SECTION A-A

DETAIL OF LETTER



DETAIL OF FRAME

DRAWN BY J. S. HARRINGTON		REVISIONS	
CHECKED BY K. C. H.		DATE	DESCRIPTION
DESIGNED BY APM - AGC		2-75	Changed weight of MH frame and revised Note 1.
PERMITTED BY R. J. S.			

LOS ANGELES COUNTY FLOOD CONTROL DISTRICT	
STANDARD	
22-INCH MANHOLE FRAME AND COVER	
APPROVED BY <i>C. H. [Signature]</i> S. C. [Signature]	APPROVED BY <i>A. [Signature]</i> S. C. [Signature]
DRAWN BY <i>[Signature]</i> S. C. [Signature]	
CHECKED BY <i>[Signature]</i> S. C. [Signature]	
DATE Mar 6 1974	
DWG. NO. 2-D-472	
SHEET 1 OF 1	
SCALE None	