
NOTES

- L. MANHOLE FRAME AND COVER SHALL BE CAST IRON OR STEEL WITH A MINIMUM WEIGHT OF 315 POUNDS.
- 2. ALL CASTING RADII SHALL BE 1/8" UNLESS OTHERWISE NOTED.
- 3. CUT-OUT SHALL BE PLACED IN RIM OF COVER OPPOSITE PICK HOLE.
- 4. FRAME AND COVER SEAT SHALL BE MACHINED.
- 5. THIS MANHOLE FRAME AND COVER ARE FOR USE IN TRAFFIC AREAS.
- 6. MANHOLE FRAME AND COVERS MAY BE ALHAMBRA FOUNDRY COMPANY A-1254 OR AN APPROVED EQUAL.
- 7. THE MANHOLE FRAME AND COVERS SHALL BE GALVANIZED AFTER FABRICATION, IF MANUFACTURED FROM STEEL.
- 8. THE MANHOLE FRAME AND COVERS SHALL BE MATCHED IN PAIRS PRIOR TO DELIVERY TO THE WORK AREAS AND THEY SHALL FIT WITHOUT ROCKING:

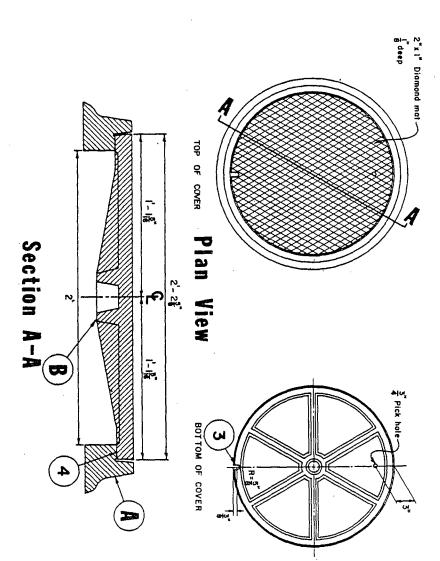

Charles + Wagner	Manhole Frame and Cover No. 2	2-105
Approved by	COUNTY OF SANTA BARBARA, CA DEPARTMENT OF PUBLIC WORKS - ROADS DIV.	COUNTY OF

11/87 DATE