
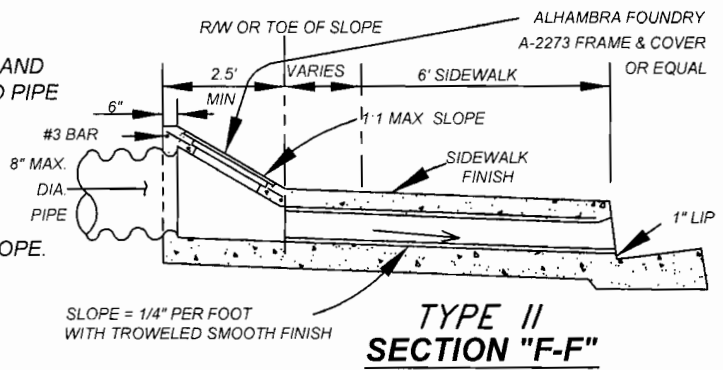


NOTES:

- 1) SPAN "S" AND HEIGHT OF OPENING AND CURB FACE AT CULVERT SHALL BE NOTED ON PLANS.
- 2) SEE STANDARD PLAN NO. 300C FOR DETAILS AND NOTES.
- 3) CONCRETE SHALL BE CLASS 560-C-3250.
- 4) FACE ANGLE SHALL BE ANCHORED BY FULL PENETRATION WITH A 3-5/8" x 6-3/8" STEEL STUD OR BUTT WELD.
- 5) UNLESS OTHERWISE SPECIFIED, STANDARD FRAME AND COVER SHALL BE ALHAMBRA FOUNDRY GALVANIZED PIPE OR APPROVED EQUAL.
- 6) 1 INCH STEEL CLEARANCE MINIMUM FROM FACE OF CONCRETE.
- 7) TOP OF INLET STRUCTURE TO MATCH ADJACENT SLOPE.

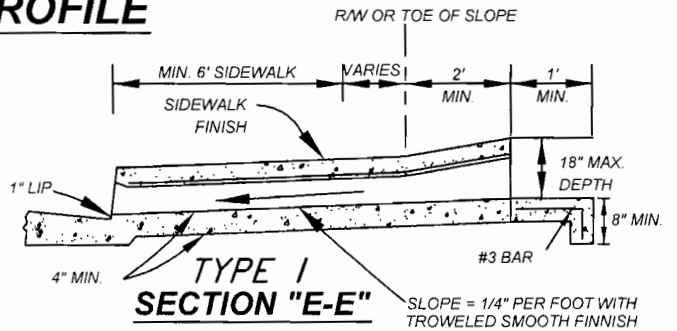

CAPITAL PROJECTS	DATE	1/05	CITY OF MORENO VALLEY	
APPROVED BY PUBLIC WORKS DIRECTOR/ CITY ENGINEER	DIVISION MANAGER INITIAL 		PREPARED BY CAPITAL PROJECTS	
			PARKWAY CULVERT TYPE "A"	1 of 3 NO. 300A